




Neostar 2S Mono-Glass Module

500W-515W


Second Generation
Comprehensive Upgrade:

 **Partial Shading Optimisation**

 **Better Temperature Coefficient**

 **High Temperature Restriction**

 **Micro-crack Resistance**

 **Higher Power**

 **Lower BOS**

 **Full Black Design**



Product
Warranty



Performance
Warranty



reddot winner 2023



Munich RE 



515W
Output

23.2%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

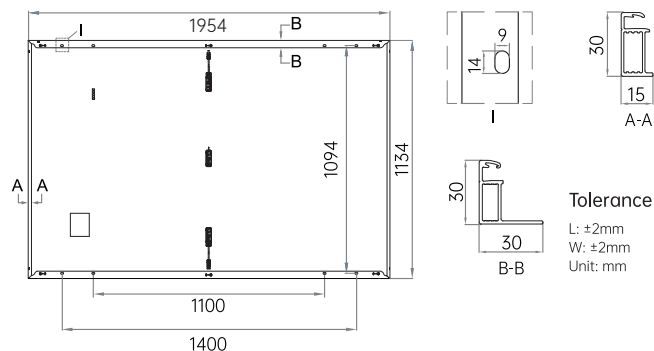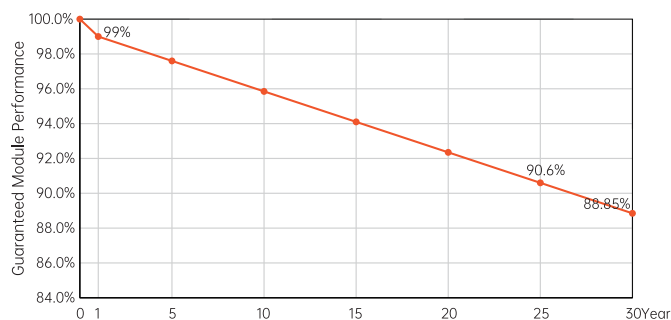

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s)

Power Tolerance: 0~ +3%

Module Type	AIKO-A500-MAH60Mb		AIKO-A505-MAH60Mb		AIKO-A510-MAH60Mb		AIKO-A515-MAH60Mb	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P _{max} [W]	500	379	505	383	510	386	515	390
V _{oc} [V]	45.02	42.71	45.12	42.80	45.22	42.90	45.32	42.99
V _{mp} [V]	37.90	35.96	38.00	36.05	38.10	36.15	38.20	36.24
I _{sc} [A]	14.05	11.35	14.11	11.40	14.17	11.45	14.23	11.49
I _{mp} [A]	13.02	10.55	13.30	10.63	13.39	10.70	13.49	10.78
Module Efficiency	22.6%		22.8%		23.0%		23.2%	

Product Specification

Cell type	N-Type ABC
Glass	3.2 mm tempered glass
Backsheet	High weather resistant backsheet
Frame	Black anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) 1200mm
No. of cells	108(6*18)
Junction Box	IP68, 3 bypass diodes
Connector	MC4-Evo2
Weight	24.0Kg±3%
Weight	1954*1134*30mm
Package Detail	36pcs per pallet /180pcs per 20GP/ 864pcs per 40HC

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +85°C
Maximum Series Fuse Rating	25A
Protection Class	Class II
V _{oc} and I _{sc} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	+5400Pa/-2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class C

DISTRÍBÚTOR PRE SLOVENSKÚ REPUBLIKU



www.aikosolar.com
marketing@aikosolar.com



D&D ENERGY
SOLAR SYSTEMS

www.ddenergy.sk | info@ddenergy.sk | 02/44 55 00 22

Showroom: Štúrova 44C, 903 01 Senec