

TECHNICAL DATA SHEET

WARMUNDERCARPET



Index


Product breakdown	1
Technical characteristics	2

WARMUNDERCARPET



The Warmundercarpet is a product composed of black aluminum and warmduplex insulation. The core of Warmset's **Black Aluminum** coil consists of the company's patented technology with the addition of a **polypropylene protective sheath** and an **aluminum coating**.

The product has a considerable advantage as it can be installed below an existing carpet or a laminate platform, guaranteeing a **high and uniform comfort**, and a rapid yield thanks to the very low inertia. Furthermore the **Warmduplex** insulation package guarantees **excellent mechanical resistance and anti-noise function**, and a perfect conductive and infrared insulation thanks to TNT / ALL.

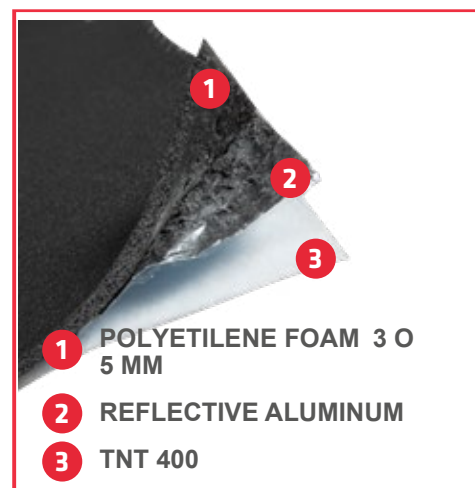

WARRANTY AND CERTIFICATION





DIMENSIONS AND CHARACTERISTICS

WARMUNDERCARPET

COVERED AREA (m ²)	DIMENSION LINEAR METER	ENVIRONMENT FROM 18 °C	ENVIRONMENT FROM 10 °C
from 0,3 to 10 m ²	width from 0,5 to 2 m length from 0,5 to 10 m	from 150 to 250 W/m ²	from 250 to 400 W/m ² *

* for power more than 300 W/sqm it's necessary install a probe for temperature control

VINYL FLOORS, RUGS, CARPET

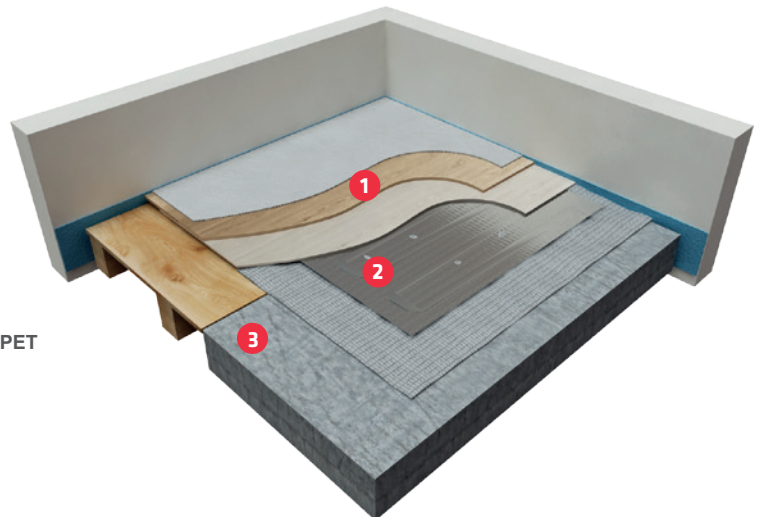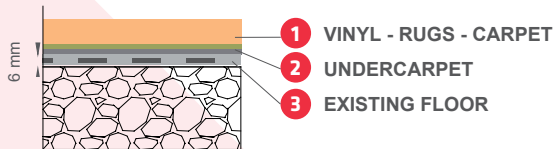

Warmundercarpet under a baby carpet